IMPEXPAR
MAQUINARIAS Y EQUIPOS

MADE IN USA
Fabricado en EE. UU.

INTERVENCIÓN DE POZOS

ACT CTU-100

Unidad de coiled tubing



Imagen ilustrativa basada en el folleto.

100.000 lb
Tiro máximo del inyector

15.000 psi
Paquete de control de presión

8.000 m
Capacidad aprox. con 1¾″

Unidad sobre remolque para intervenir pozos con tubería flexible continua. Integra el inyector, el carrete, el control de presión y una cabina con adquisición de datos.

ESPECIFICACIONES TÉCNICAS

Inyector	ACT IST 100K; 50.000 lb de empuje (snub).
Carrete	Diámetro exterior de 154″; guía hidráulica de bobinado.
Control de presión	BOP Quad y Combi de 15.000 psi, paso de 4,06″ y doble stripper dinámico.
Sistema hidráulico	Circuito cerrado con depósito de 800 L.
Cabina y control	Cabina telescópica climatizada y adquisición de datos MEDCO.
Tractocamión	Kenworth T880 con Cummins ISX15 de 530 HP.

APLICACIONES

Limpieza de pozos, levantamiento con nitrógeno, estimulación ácida, fresado y pesca de herramientas.

El valor de 15.000 psi corresponde al paquete de control de presión.

IMPEXPAR C.A. RIF J-30568831-1
Distribuidor para Venezuela

www.impexpar.com
WhatsApp +1-786-238-5700


IMPEXPAR
MAQUINARIAS Y EQUIPOS

MADE IN USA
Fabricado en EE. UU.

WELL INTERVENTION

ACT CTU-100

Coiled Tubing Unit

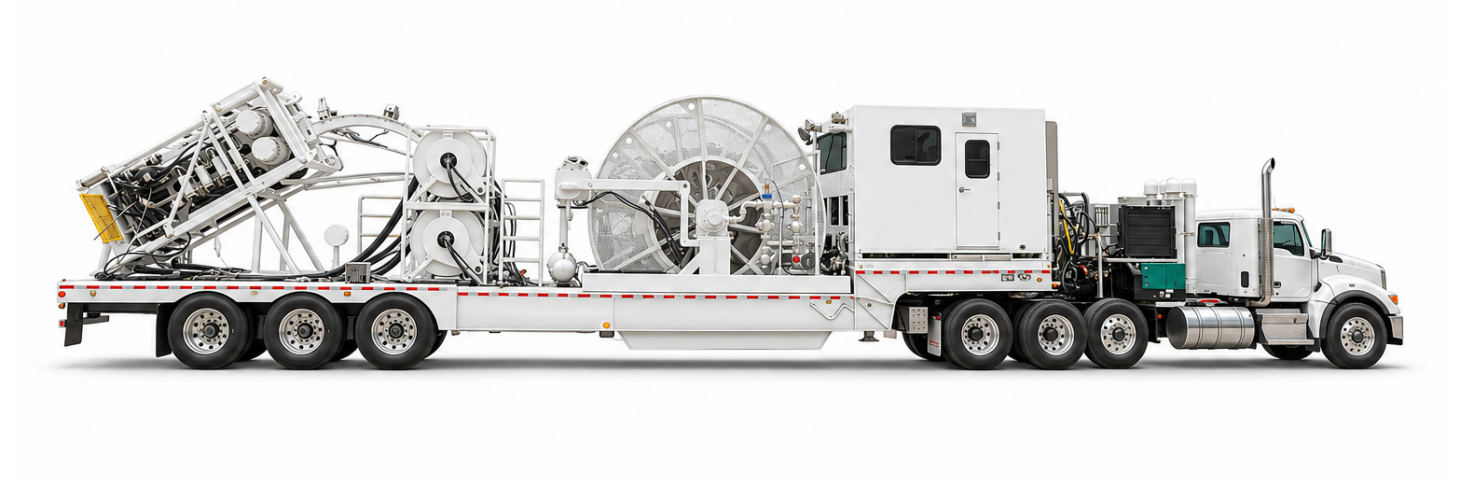

Illustrative image based on the brochure.

100,000 lb
Maximum injector pull

15,000 psi
Pressure-control package

8,000 m
Approx. capacity with 1¾″ tubing

Trailer-mounted unit for well intervention with continuous coiled tubing. Integrates the injector, reel, pressure-control equipment and a data-equipped operator cabin.

TECHNICAL SPECIFICATIONS

Injector	ACT IST 100K; 50,000 lb snub force.
Reel	154″ outside diameter; hydraulic levelwind.
Pressure control	15,000 psi Quad and Combi BOPs, 4.06″ bore and dual dynamic stripper.
Hydraulic system	Closed-loop system with 800 L reservoir.
Cabin and controls	Telescoping climate-controlled cabin and MEDCO data acquisition.
Truck tractor	Kenworth T880 with 530 HP Cummins ISX15.

APPLICATIONS

Well cleanouts, nitrogen lifting, acid stimulation, milling and fishing.

The 15,000 psi rating applies to the pressure-control package.

IMPEXPAR C.A. RIF J-30568831-1
Distributor for Venezuela

www.impexpar.com
WhatsApp +1-786-238-5700